

# Phase Control Power Thyristors



- designed for high power industrial and power transmission applications
- optimized for low on-state voltage drop
- matched  $Q_{rr}$  and  $V_T$  values available for series and/or parallel connections

Part number	$V_{DRM}$	$V_{RRM}$	$I_{TAVM}$	$I_{TSM}$		$V_{TO}$	$r_T$	$T_{VJM}$	$R_{thJC}$	$R_{thCH}$	$F_m$	Housing
	$T_{VJM}$		$T_C=70^\circ\text{C}$	8.3ms	10ms	$T_{VJM}$						
	V	A	A	kA	kA	V	m $\Omega$					
5STP 10D1601	1600		969	16.0	15.0	0.93	0.302	125	32.0	7.5	10	D
5STP 20F1601	1600		1901	29.2	27.3	0.95	0.152	125	16.0	4.0	22	F
5STP 34H1601	1600		3370	52.3	49.0	0.94	0.066	125	10.0	3.0	50	H
5STP 07D1800	1800		730	9.5	9.0	0.80	0.540	125	36.0	7.5	10	D
5STP 09D1801	1800		932	14.6	13.7	0.94	0.341	125	32.0	7.5	10	D
5STP 18F1800	1800		1660	22.0	21.0	0.83	0.230	125	17.0	4.0	22	F
5STP 18F1801	1800		1825	28.0	26.2	0.97	0.170	125	16.0	4.0	22	F
5STP 27H1800	1800		3000	53.3	50.5	0.88	0.103	125	10.0	2.0	50	H
5STP 30H1801	1800		3108	50.2	47.0	0.98	0.081	125	10.0	3.0	50	H
5STP 50Q1800	1800		6100	100.0	94.0	0.90	0.050	125	5.0	1.0	90	Q
5STP 09D2201	2200		862	12.8	12.0	1.00	0.404	125	32.0	7.5	10	D
5STP 17F2201	2200		1702	27.2	25.5	0.99	0.206	125	16.0	4.0	22	F
5STP 29H2201	2200		2855	48.1	45.0	1.00	0.107	125	10.0	3.0	50	H
5STP 06D2800	2800		620	8.5	8.0	0.92	0.780	125	36.0	7.5	10	D
5STP 08D2801	2800		793	11.3	10.6	1.02	0.510	125	32.0	7.5	10	D
5STP 16F2800	2800		1400	19.0	18.0	0.82	0.370	125	17.0	4.0	22	F
5STP 16F2801	2800		1512	25.2	23.6	1.02	0.265	125	16.0	4.0	22	F
5STP 24H2800	2800		2625	46.0	43.0	0.85	0.160	125	10.0	2.0	50	H
5STP 27H2801	2800		2670	45.9	43.0	1.04	0.127	125	10.0	3.0	50	H
5STP 33L2800	2800		3740	65.0	60.0	0.95	0.100	125	7.0	1.5	70	L
5STP 45N2800	2800		5080	79.0	75.0	0.86	0.070	125	5.7	1.0	90	N
5STP 45Q2800	2800		5490	79.0	75.0	0.86	0.070	125	5.0	1.0	90	Q
5STP 04D4200	4200		470	7.0	6.4	1.00	1.500	125	36.0	7.5	10	D
5STP 12F4200	4200		1150	16.0	15.0	0.95	0.575	125	17.0	4.0	22	F
5STP 18H4200	4200		2075	35.0	32.0	0.96	0.285	125	10.0	2.0	50	H
5STP 28L4200	4200		3170	55.6	52.0	0.97	0.158	125	7.0	1.5	70	L
5STP 38N4200	4200		3960	65.0	60.0	0.95	0.130	125	5.7	1.0	90	N
5STP 38Q4200	4200		4275	65.0	60.0	0.95	0.130	125	5.0	1.0	90	Q

Please refer to page 21 for part numbering structure.


# Phase Control Power Thyristors



- designed for high power industrial and power transmission applications
- optimized for low on-state voltage drop
- matched  $Q_{rr}$  and  $V_T$  values available for series and/or parallel connections

Part number	$V_{DRM}$	$V_{RRM}$	$I_{TAVM}$	$I_{TSM}$		$V_{TO}$	$r_T$	$T_{VJM}$	$R_{thJC}$	$R_{thCH}$	$F_m$	Housing
	$T_{VJM}$		$T_C=70^\circ\text{C}$	8.3ms	10ms	$T_{VJM}$						
	V	A	A	kA	kA	V	m $\Omega$					
5STP 04D5200	5200		440	5.4	5.0	1.20	1.600	125	36.0	7.5	10	D
5STP 17H5200	5200		1975	31.0	29.0	1.02	0.320	125	10.0	2.0	50	H
5STP 25L5200	5200		2760	45.0	42.0	1.00	0.225	125	7.0	1.5	70	L
5STP 25M5200	5200		2540	45.0	42.0	1.00	0.225	125	9.0	1.5	70	M
5STP 34N5200	5200		3600	60.0	55.0	1.03	0.160	125	5.7	1.0	90	N
5STP 34Q5200	5200		3875	60.0	55.0	1.03	0.160	125	5.0	1.0	90	Q
5STP 52U5200	5200		4120	90.3	82.5	1.04	0.115	110	4.0	0.8	135	U
5STP 03D6500	6500		380	4.8	4.5	1.20	2.300	125	36.0	7.5	10	D
5STP 08F6500	6500		830	12.8	11.8	1.24	1.015	125	17.0	4.0	22	F
5STP 08G6500	6500		720	12.8	11.8	1.24	1.015	125	22.0	4.0	22	G
5STP 12K6500	6500		1370	23.4	21.9	1.18	0.632	125	11.0	2.0	50	K
5STP 18M6500	6500		1800	35.0	32.0	1.20	0.430	125	9.0	1.5	70	M
5STP 26N6500	6500		2810	50.0	45.0	1.12	0.290	125	5.7	1.0	90	N
5STP 42U6500	6500		3430	76.2	71.4	1.24	0.162	110	4.0	0.8	135	U
5STP 03X6500	6500		350	4.8	4.5	1.20	2.300	125	45.0	7.5	10	X
5STP 12N8500	8500		1200	38.0	35.0	1.25	0.480	90	5.7	1.0	90	N

Please refer to page 21 for part numbering structure.

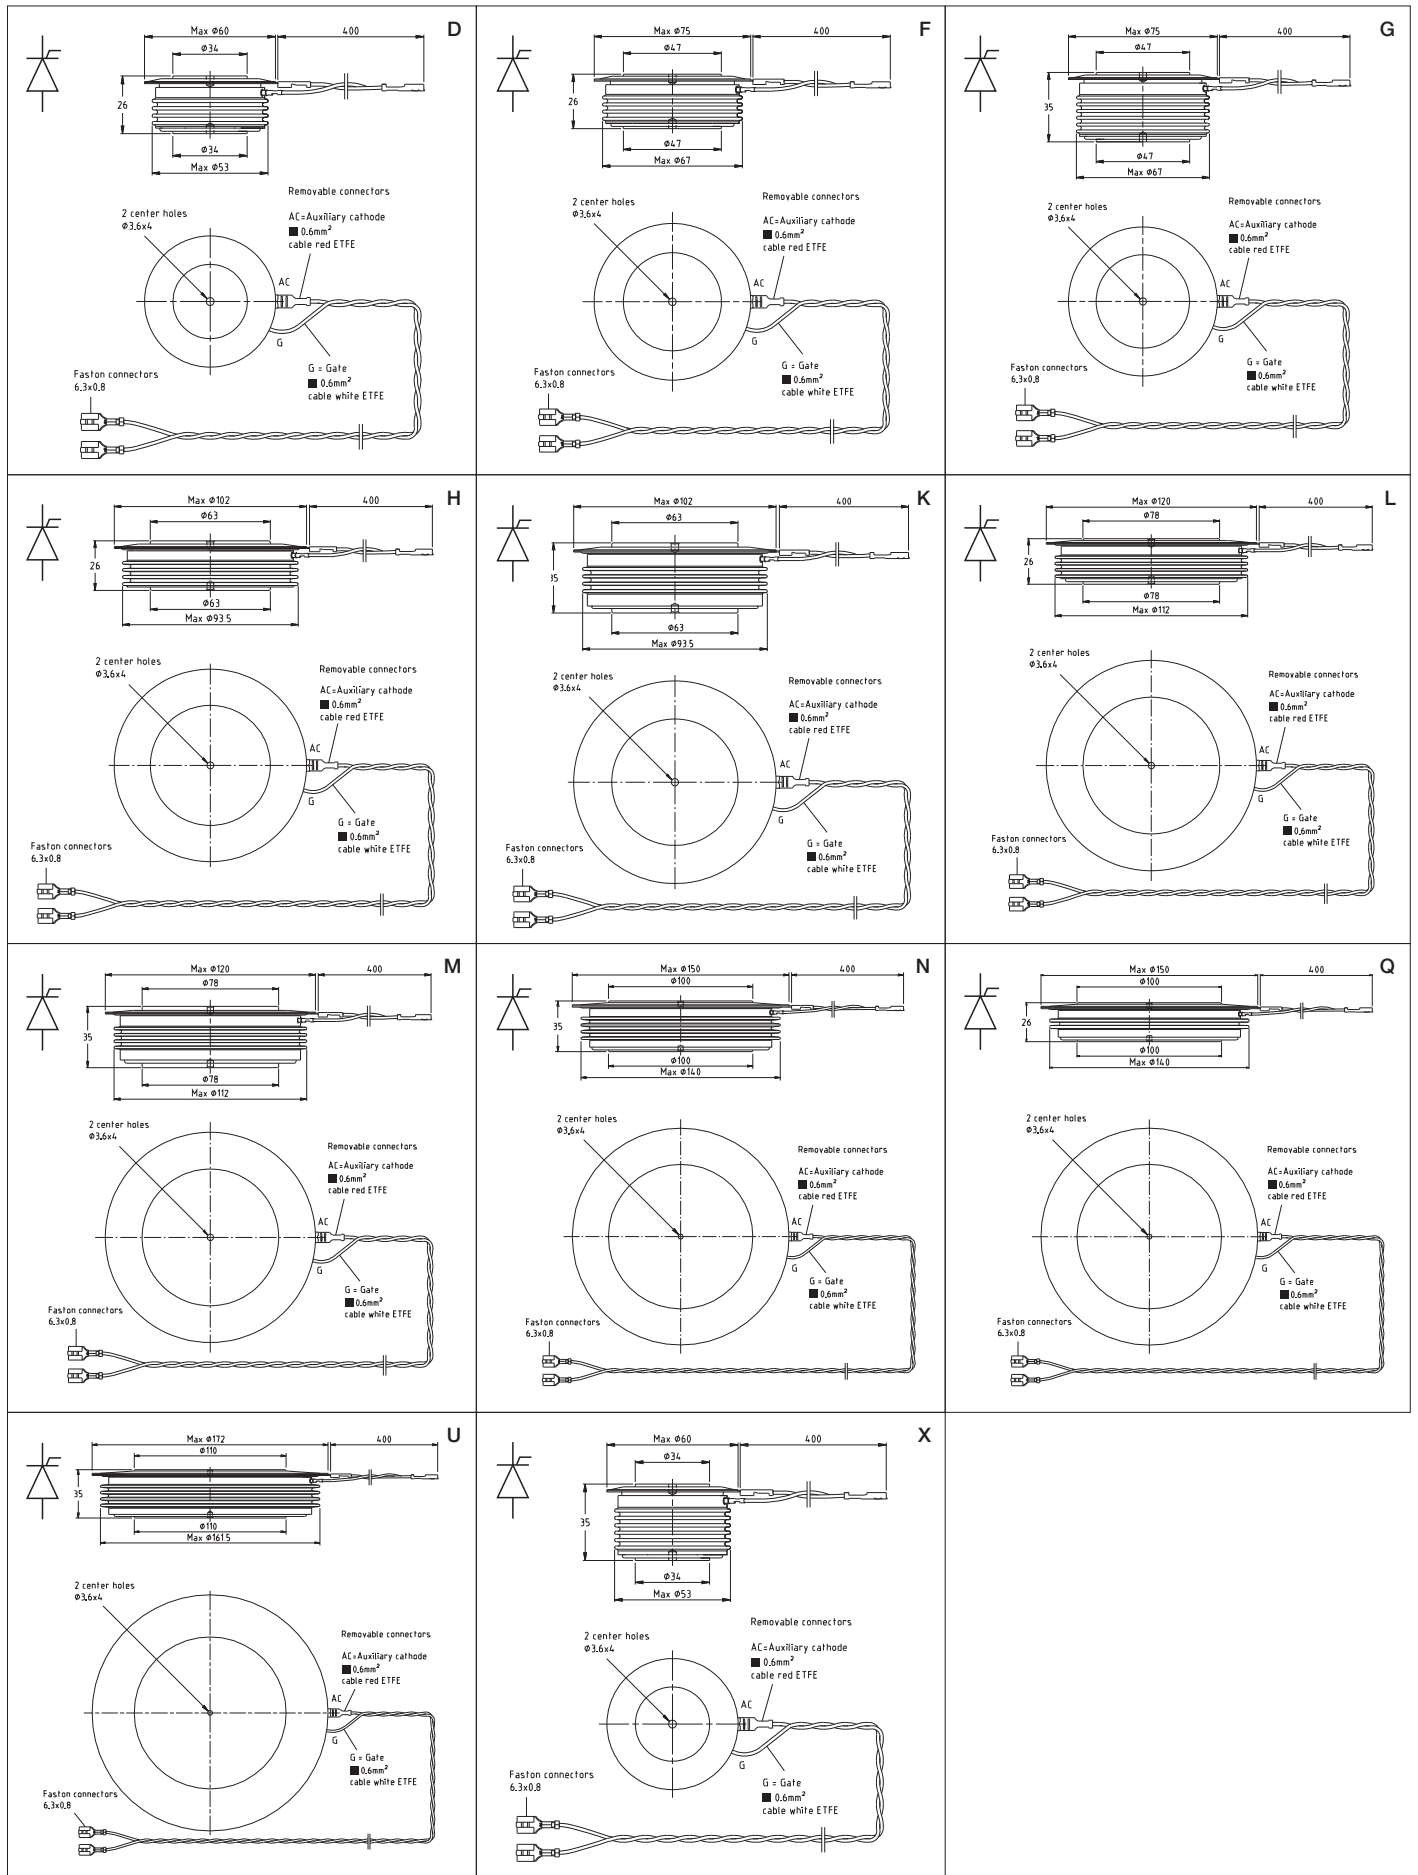

Dimensions in mm